

Nominal Voltage(V)

12V

Nominal Capacity

100 hour rate (1.05A to 10.8V) 105Ah
 20 hour rate (5A to 10.5V) 100Ah
 10 hour rate (9.5A to 10.5V) 95Ah
 5 hour rate (17A to 10.2V) 85Ah

Weight

Approx. 31kg(68.2Lbs.)

Internal Resistance (at 1KHz)

Approx. 4.5mΩ

Cold Cranking Amps(CCA) (-17.8°C)

800A

Marine Cranking Amps(MCA) (0°C)

1000A

Reserve Capacity(RC) (25°C)

25A to 10.50V 200min

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 13.8 to 14.6V

Coefficient -5.0mV/°C/cell

Recommended Charge Current : 30A

Standby use:

Float Charging Voltage 13.4 to 13.6V

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge -15°C (5°F) to 40°C (104°F)

Discharge -15°C (5°F) to 50°C (122°F)

Storage -15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)


1 month 98%

3 month 94%


6 month 85%

Case Material


ABS UL94 HB

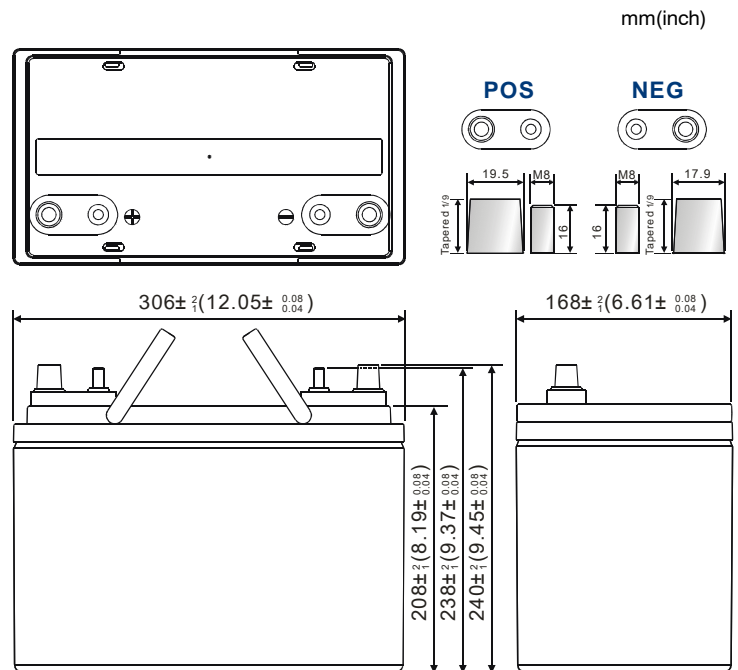


Effect of Temperature on Capacity 25°C (77°F)

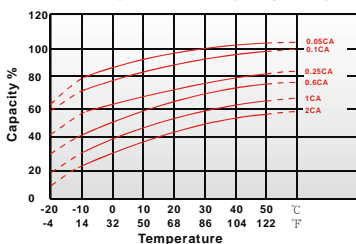

Capacity Retention Characteristic



Cycle Service Life



Discharge Time VS. Discharge Current (25°C)

