

Nominal Voltage(V)

12V

Nominal Capacity

100 hour rate (1.155A to 10.8V)	115.5Ah
20 hour rate (5.5A to 10.5V)	110Ah
10 hour rate (10.45A to 10.5V)	104.5Ah
5 hour rate (18.7A to 10.2V)	93.5Ah

Weight

Approx. 32kg(70.4Lbs.)

Internal Resistance (at 1KHz)

Approx. 4.5mΩ

Cold Cranking Amps(CCA) (-17.8°C)

925A

Marine Cranking Amps(MCA) (0°C)

1160A

Reserve Capacity(RC) (25°C)

25A to 10.50V 210min

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 13.8 to 14.6V

Coefficient -5.0mV/°C/cell

Recommended Charge Current : 33A

Standby use:

Float Charging Voltage 13.4 to 13.6V

Coefficient -3.0mV/°C/cell

Operating Temperature Range

Charge -15°C (5°F) to 40°C (104°F)

Discharge -15°C (5°F) to 50°C (122°F)

Storage -15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month 98%

3 month 94%


6 month 85%

Case Material


ABS UL94 HB




Effect of Temperature on Capacity 25°C(77°F)




Capacity Retention Characteristic



Cycle Service Life



Discharge Time VS. Discharge Current (25°C)

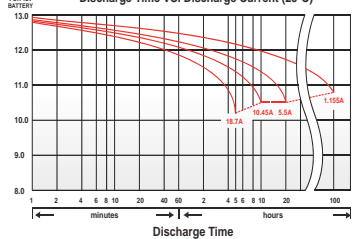

mm(inch)

