



## Yuasa Technisches Datenblatt

### Yuasa YBX1063 - YBX1000 CaCa Batterien

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Leistung

Spannung 12V  
Kapazität 20 Std (vorgegeben) 40Ah  
Kaltstartstrom (A) EN1 360A

#### Abmessungen

Länge 207mm  
Breite 175mm  
Höhe 175mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 11.4kg  
Säurevolumen 3 Liter



#### Gehäuseeigenschaften

Gehäusotyp LB1 DIN  
Batteriehalter B13/B14  
Ladezustandsanzeige ✓  
Tragegriffe ✓  
Entgasung ✓  
Deckeltyp Zentralentgasung


#### Technologie

Flammschutz ✓  
Technologie Ca/Ca  
Adskiller PE  
Empfohlener Ladestrom 2A  
Performance Marking W3-C2-V2-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post

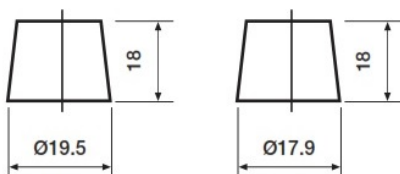

Positive Terminal

Negative Terminal


#### Zellenanordnung

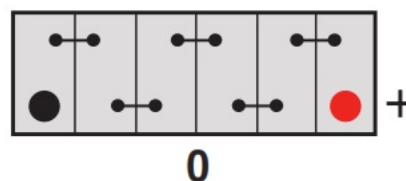

0

#### Batteriehalter

B3/B4 (B3 with Hold-Down adaptor)

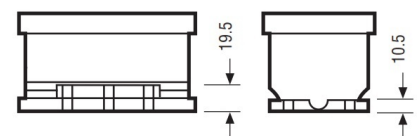

Datenblatt erstellt am 11/06/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX1063 - YBX1000 CaCa Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	360A

#### Dimensions

Length	207mm
Width	175mm
Height	175mm

#### Weights & Measures

Mean Weight with Acid	11.4kg
Acid Volume	3 litres



#### Container Features

Case Type	LB1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
Recommended Charge Rate	PE
Performance Marking	2A
	W3-C2-V2-E1


#### Terminal Type

##### T1

Standard DIN Post

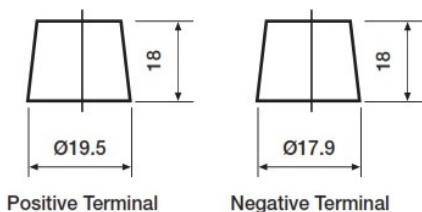


#### Cell Assembly Layout

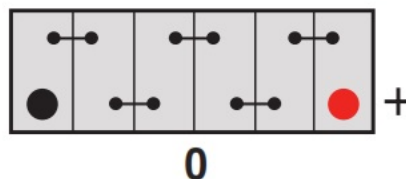

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

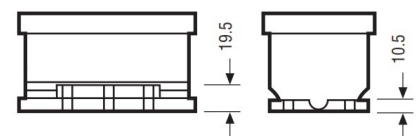

Data Sheet generated on 11/06/2024 - E&OE