



## Yuasa Technisches Datenblatt

### Yuasa YBX1072 - YBX1000 CaCa Batterien

#### Leistung

|                               |      |
|-------------------------------|------|
| Spannung                      | 12V  |
| Kapazität 20 Std (vorgegeben) | 72Ah |
| Kaltstartstrom (A) EN1        | 600A |

#### Abmessungen

|        |       |
|--------|-------|
| Länge  | 258mm |
| Breite | 173mm |
| Höhe   | 206mm |

#### Maße und Gewichte

|  |           |
|--|-----------|
| Durchschnittliches Gewicht inkl. Säure | 18.8kg    |
| Säurevolumen                           | 4.4 Liter |



#### Gehäuseeigenschaften

|                 |                   |
|-----------------|-------------------|
| Gehäusotyp      | D26 T-Lid (Volvo) |
| Zellenanordnung | 1                 |
| Batteriehälter  | N                 |
| Tragegriffe     | ✓                 |
| Entgasung       | ✓                 |
| Deckeltyp       | Zentralentgasung  |


#### Technologie

|                       |             |
|-----------------------|-------------|
| Flammschutz           | ✓           |
| Technologie           | Ca/Ca       |
| Adskiller             | PE          |
| Empfohlener Ladestrom | 4A          |
| Performance Marking   | W3-C2-V2-E1 |


#### Anschlusspol Typ

##### T1


Standard DIN Post



Positive Terminal



Negative Terminal

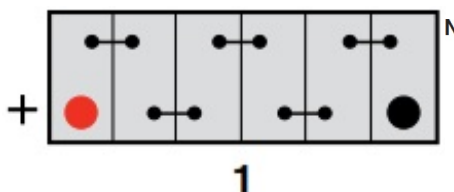

1

#### Batteriehälter



Datenblatt erstellt am 11/06/2024 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX1072 - YBX1000 CaCa Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 72Ah |
| Cold Cranking Amps (EN1) | 600A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 258mm |
| Width  | 173mm |
| Height | 206mm |

#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 18.8kg     |
| Acid Volume           | 4.4 litres |



#### Container Features

|             |                   |
|-------------|-------------------|
| Case Type   | D26 T-Lid (Volvo) |
| Cell Layout | 1                 |
| Hold Down   | N                 |
| Handles     | ✓                 |
| End Venting | ✓                 |
| Lid Type    | Central Venting   |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W3-C2-V2-E1 |

#### Terminal Type

##### T1


Standard DIN Post

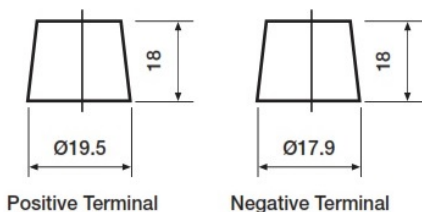

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

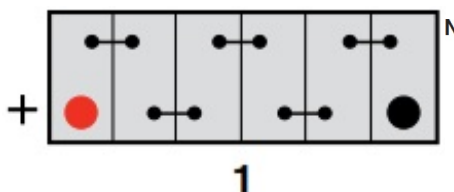

#### Battery Hold-down



Data Sheet generated on 11/06/2024 - E&OE