



## Yuasa Technisches Datenblatt

### Yuasa YBX3069 - YBX3000 SMF Batterien

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	72Ah
Kaltstartstrom (A) EN1	630A

#### Abmessungen

Länge	269mm
Breite	174mm
Höhe	225mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	17.5kg
--	--------



#### Gehäuseeigenschaften

Gehäusotyp	JIS D26 + B9
Zellenanordnung	1
Batteriehälter	B5
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion

#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	4A
Performance Marking	W4-C2-V3-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post



Positive Terminal


Negative Terminal

#### Zellenanordnung

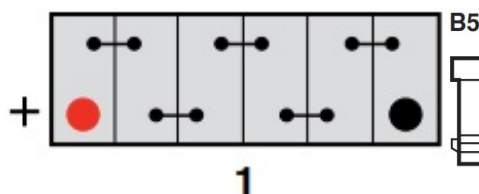

1

#### Batteriehälter

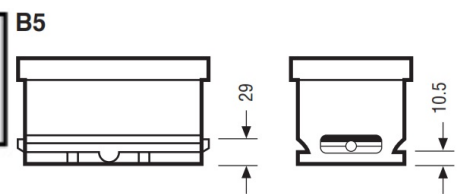

Datenblatt erstellt am 31/03/2025 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3069 - YBX3000 SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	72Ah
Cold Cranking Amps (EN1)	630A

#### Dimensions

Length	269mm
Width	174mm
Height	225mm

#### Weights & Measures

Mean Weight with Acid	17.5kg
-----------------------	--------



#### Container Features

Case Type	JIS D26 + B9
Cell Layout	1
Hold Down	B5
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1

#### Terminal Type

##### T1


Standard DIN Post

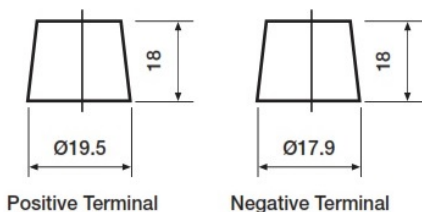


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

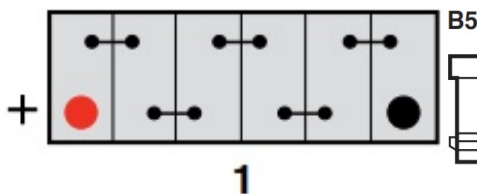

#### Battery Hold-down

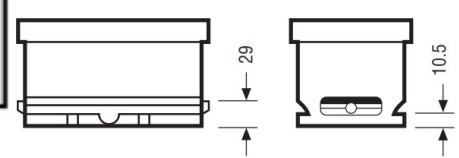

Data Sheet generated on 31/03/2025 - E&OE

