



## Yuasa Technisches Datenblatt

### Yuasa YBX3075 - YBX3000 SMF Batterien

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Leistung

Spannung 12V  
Kapazität 20 Std (vorgegeben) 60Ah  
Kaltstartstrom (A) EN1 550A

#### Abmessungen

Länge 243mm  
Breite 175mm  
Höhe 175mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 14.4kg



#### Gehäuseeigenschaften

Gehäusetyp LB2 DIN  
Batteriehalter B13/B14  
Ladezustandsanzeige ✓  
Tragegriffe ✓  
Entgasung ✓  
Deckeltyp SMF doppelwandige Deckelkonstruktion

#### Technologie

Flammschutz ✓  
Technologie Ca/Ca  
Adskiller PE  
VDA Überschlagentest ✓  
Empfohlener Ladestrom 4A  
Performance Marking W3-C2-V2-E1

#### Anschlusspol Typ

##### T1


Standard DIN Post



Positive Terminal


Negative Terminal

#### Zellenanordnung

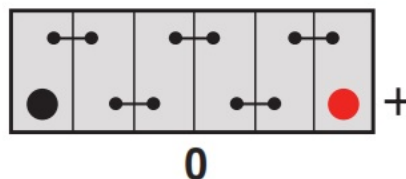

#### Batteriehalter

B3/B4 (B3 with Hold-Down adaptor)

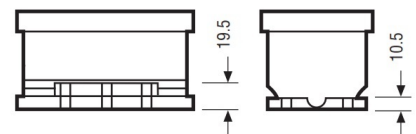

Datenblatt erstellt am 31/03/2025 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3075 - YBX3000 SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	550A

#### Dimensions

Length	243mm
Width	175mm
Height	175mm

#### Weights & Measures

Mean Weight with Acid	14.4kg
-----------------------	--------



#### Container Features

Case Type	LB2 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1

#### Terminal Type

##### T1


Standard DIN Post

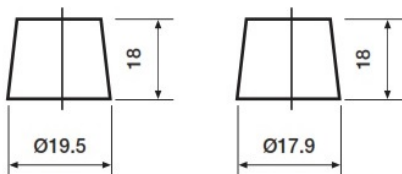

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

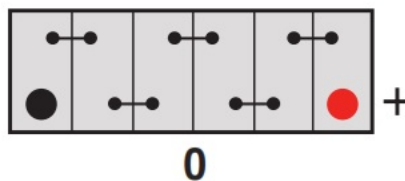

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

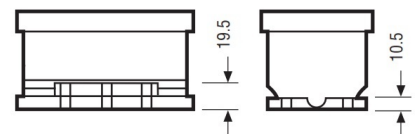

Data Sheet generated on 31/03/2025 - E&OE