



Yuasa Technisches Datenblatt

Yuasa YBX3750 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	66Ah
Kaltstartstrom (A) EN1	660A

Abmessungen

Länge	230mm
Breite	179mm
Höhe	185mm



Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	15kg
--	------


Gehäuseeigenschaften

Gehäusotyp	US Group 75R FT
Zellenanordnung	1
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	4A
Performance Marking	W4-C2-V3-E1


Anschlusspol Typ



Zellenanordnung

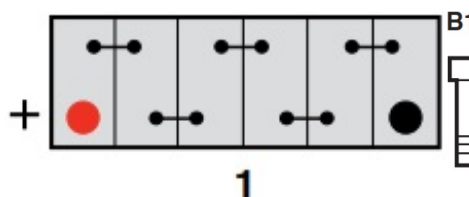

Batteriehälter

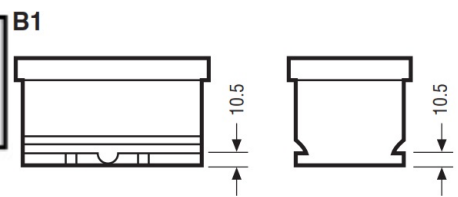

Datenblatt erstellt am 31/03/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3750 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	66Ah
Cold Cranking Amps (EN1)	660A

Dimensions

Length	230mm
Width	179mm
Height	185mm

Weights & Measures

Mean Weight with Acid	15kg
-----------------------	------




Container Features

Case Type	US Group 75R FT
Cell Layout	1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W4-C2-V3-E1


Terminal Type



Cell Assembly Layout

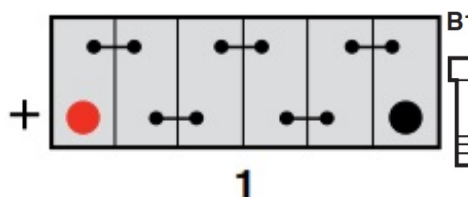

Battery Hold-down

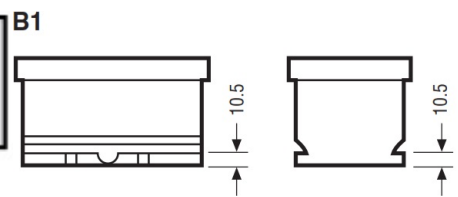

Data Sheet generated on 31/03/2025 - E&OE