



## Yuasa Technisches Datenblatt

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batterien

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Leistung

Spannung 12V  
Kapazität 20 Std (vorgegeben) 80Ah  
Kaltstartstrom (A) EN1 800A

#### Abmessungen

Länge 317mm  
Breite 175mm  
Höhe 190mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 23.2kg



#### Gehäuseeigenschaften

Gehäusotyp L4 DIN AGM  
Batteriehalter B3  
Tragegriffe ✓  
Entgasung ✓  
Semi Traktionseigenschaften ✓  
Deckeltyp VRLA


#### Technologie

Flammschutz ✓  
Technologie Ca/Ca VRLA  
Adskiller AGMSORTIMENT  
VDA Überschlagentest ✓  
Empfohlener Ladestrom 5A  
Performance Marking W5-C2-V3-M3

#### Anschlusspol Typ

##### T1


Standard DIN Post

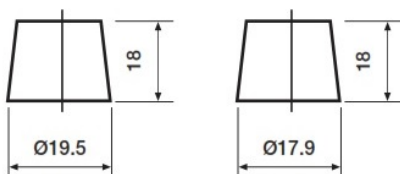

Positive Terminal

Negative Terminal

#### Zellenanordnung

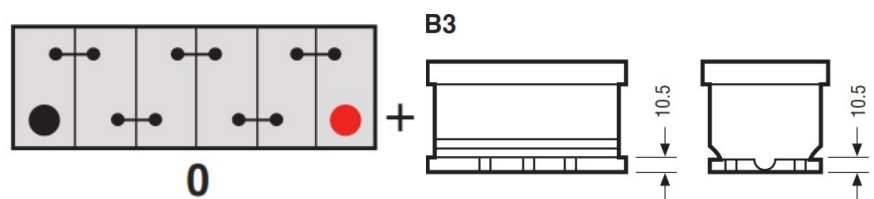

#### Batteriehalter

Datenblatt erstellt am 01/04/2025 - E&EO



## Yuasa Technical Data Sheet

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 80Ah |
| Cold Cranking Amps (EN1) | 800A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 317mm |
| Width  | 175mm |
| Height | 190mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 23.2kg |
|-----------------------|--------|



#### Container Features

|                        |            |
|------------------------|------------|
| Case Type              | L4 DIN AGM |
| Hold Down              | B3         |
| Handles                | ✓          |
| End Venting            | ✓          |
| Semi-Traction Features | ✓          |
| Lid Type               | VRLA       |


#### Technology

|                           |             |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓           |
| Separator                 | Ca/Ca VRLA  |
| VDA Roll Over Test        | AGM         |
| Recommended Charge Rate   | ✓           |
| Performance Marking       | 5A          |
|                           | W5-C2-V3-M3 |

#### Terminal Type

##### T1


Standard DIN Post

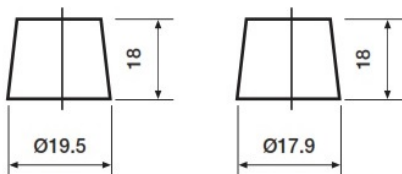


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

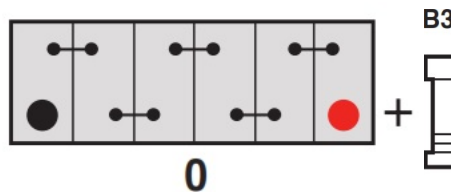

#### Battery Hold-down

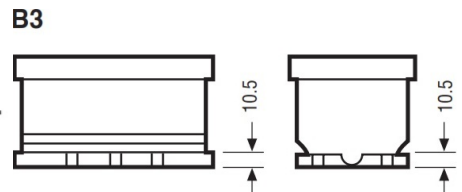

Data Sheet generated on 01/04/2025 - E&OE

