



Yuasa Technisches Datenblatt

Yuasa YBX1012 - YBX1000 CaCa Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	45Ah
Kaltstartstrom (A) EN1	380A

Abmessungen

Länge	207mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	12.7kg
Säurevolumen	3.1 Liter



Gehäuseeigenschaften

Gehäusotyp	L1 DIN
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	Zentralentgasung


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
Empfohlener Ladestrom	3A
Performance Marking	W3-C2-V2-E1

Anschlusspol Typ

T1


Standard DIN Post

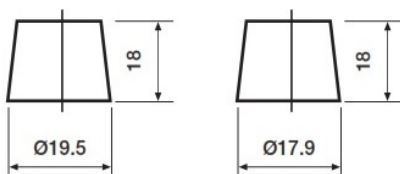

Positive Terminal

Negative Terminal


Zellenanordnung

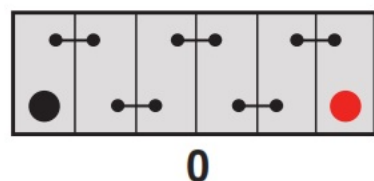

0

Batteriehälter

B3

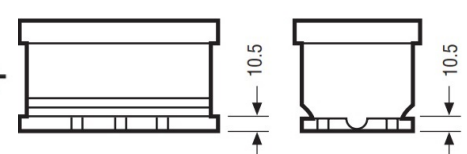

Datenblatt erstellt am 11/06/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX1012 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	380A

Dimensions

Length	207mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	12.7kg
Acid Volume	3.1 litres



Container Features

Case Type	L1 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post

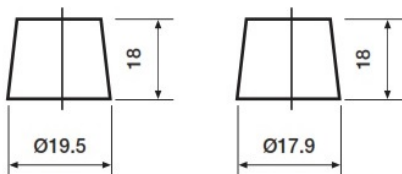

Positive Terminal


Negative Terminal

Cell Assembly Layout

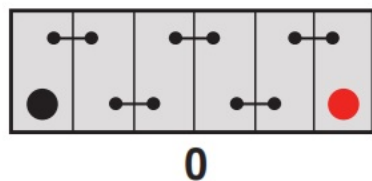

Battery Hold-down

B3

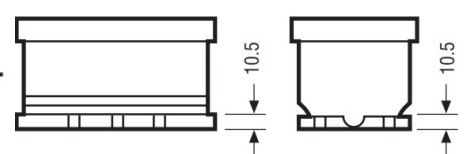

Data Sheet generated on 11/06/2024 – E&OE