



## Yuasa Technisches Datenblatt

### Yuasa YBX7055 - YBX7000 EFB Start Stop Plus Batterien

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	40Ah
Kaltstartstrom (A) EN1	400A

#### Abmessungen

Länge	197mm
Breite	128mm
Höhe	227mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	10.7kg
Säurevolumen	2.7 Liter



#### Gehäuseeigenschaften

Gehäusotyp	B20 JIS EFB (M42R)
Zellenanordnung	1
Batteriehälter	N
Deckeltyp	Flacher Deckel


#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
Empfohlener Ladestrom	2A
Performance Marking	W3-C2-V3-M1


#### Anschlusspol Typ

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Zellenanordnung

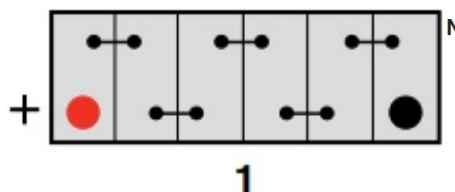

#### Batteriehälter



Datenblatt erstellt am 01/04/2025 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX7055 - YBX7000 EFB Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	400A

#### Dimensions

Length	197mm
Width	128mm
Height	227mm

#### Weights & Measures

Mean Weight with Acid	10.7kg
Acid Volume	2.7 litres



#### Container Features

Case Type	B20 JIS EFB (M42R)
Cell Layout	1
Hold Down	N
Lid Type	Flat Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	2A
Performance Marking	W3-C2-V3-M1


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

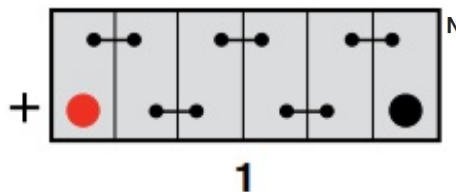

#### Battery Hold-down



Data Sheet generated on 01/04/2025 - E&OE