



Yuasa Technisches Datenblatt

Yuasa YBX3012 - YBX3000 SMF Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
 Kapazität 20 Std (vorgegeben) 52Ah
 Kaltstartstrom (A) EN1 450A

Abmessungen

Länge 207mm
 Breite 175mm
 Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 13.3kg



Gehäuseeigenschaften

Gehäusetyp L1 DIN
 Batteriehalter B13/B14
 Ladezustandsanzeige ✓
 Tragegriffe ✓
 Entgasung ✓
 Deckeltyp SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz ✓
 Technologie Ca/Ca
 Adskiller PE
 VDA Überschlagentest ✓
 Empfohlener Ladestrom 3A
 Performance Marking W3-C2-V2-E1

Anschlusspol Typ

T1


Standard DIN Post

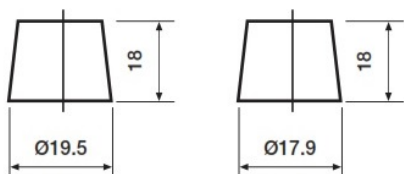

Positive Terminal

Negative Terminal

Zellenanordnung

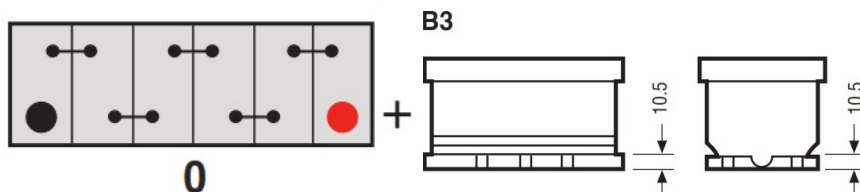

Batteriehalter

Datenblatt erstellt am 11/06/2024 - E&EO





Yuasa Technical Data Sheet

Yuasa YBX3012 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	52Ah
Cold Cranking Amps (EN1)	450A

Dimensions

Length	207mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	13.3kg
-----------------------	--------



Container Features

Case Type	L1 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	3A
	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout

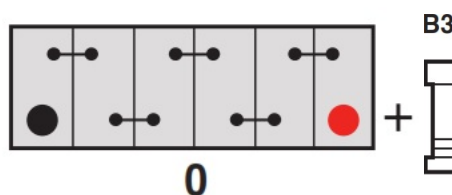

Battery Hold-down

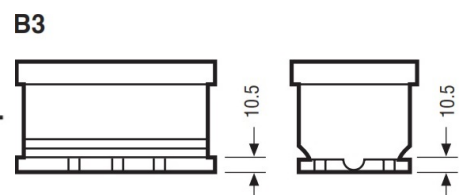

Data Sheet generated on 11/06/2024 - E&OE