



Yuasa Technisches Datenblatt

Yuasa YBX3019 - YBX3000 SMF Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	95Ah
Kaltstartstrom (A) EN1	850A

Abmessungen

Länge	353mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	24kg
--	------



Gehäuseeigenschaften

Gehäusotyp	L5 DIN
Anschlusspol Typ	T1
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
VDA Überschlagentest	✓
Empfohlener Ladestrom	6A
Performance Marking	W3-C2-V2-E1

Anschlusspol Typ

T1


Standard DIN Post

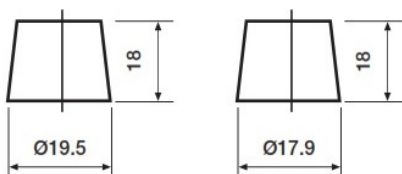

Positive Terminal

Negative Terminal

Zellenanordnung

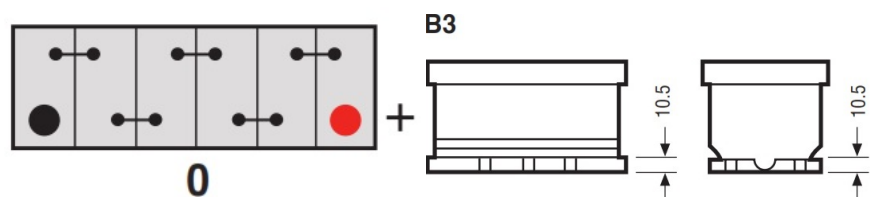

Batteriehälter

Datenblatt erstellt am 13/06/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3019 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	95Ah
Cold Cranking Amps (EN1)	850A

Dimensions

Length	353mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	24kg
-----------------------	------



Container Features

Case Type	L5 DIN
Terminal Type	T1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	6A
	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post

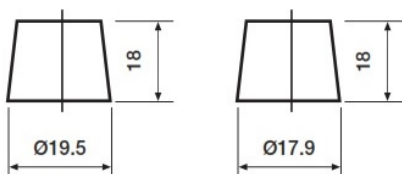


Positive Terminal

Negative Terminal

Cell Assembly Layout

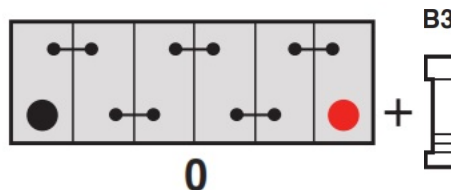

Battery Hold-down

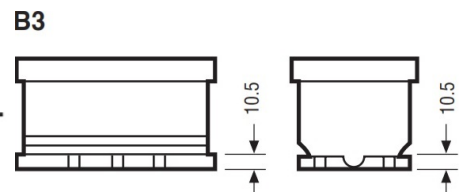

Data Sheet generated on 13/06/2024 - E&OE