



Yuasa Technisches Datenblatt

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	70Ah
Kaltstartstrom (A) EN1	760A

Abmessungen

Länge	278mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	20.5kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	L3 DIN AGM
Anschlusspol Typ	T1
Batteriehälter	B3
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA

Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Adskiller	AGMSORTIMENT
VDA Überschlagtest	✓
Empfohlener Ladestrom	4A
Performance Marking	W5-C2-V3-M3

Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal

Negative Terminal


Zellenanordnung

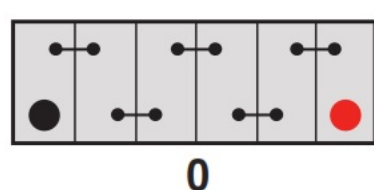

0

Batteriehälter

B3

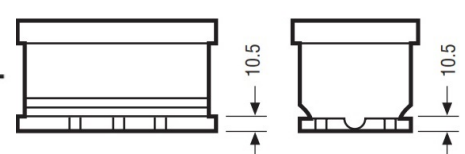

Datenblatt erstellt am 01/04/2025 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



Container Features

Case Type	L3 DIN AGM
Terminal Type	T1
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

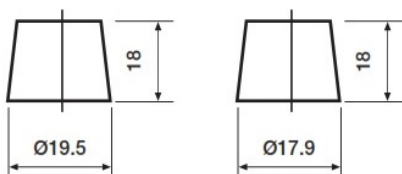


Positive Terminal

Negative Terminal

Cell Assembly Layout

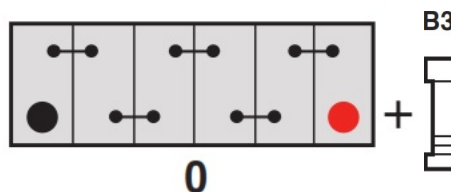

Battery Hold-down

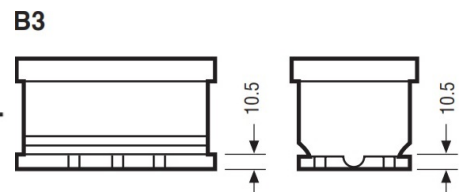

Data Sheet generated on 01/04/2025 - E&OE